


符号/Symbol



规格/Specification


保证耐压力/ Ensured Pressure Resistance	1. 5MPa(15kgf/cm²)
最高使用压力/Highest Working Pressure	1.0MPa(10kgf/cm²)
环境及流体温度 /Ambient and Fluid Temperature	5~60°C
*过滤精度/ *Filter Precision	25µm
建议用油/ Recommended Oil Use	透平1号油 /Turbine No.1 Oil ISOVG32
容器材料 /Container Material	聚碳酸酯/ Polycarbonate
防护罩 /Protective Cover	AC2000(无/Not Available) AC300-5000(有/Available)
调压范围 Pressure Regulating Range	AC2000-5000: 0.05-0.85MPa(0.5-8.5kgf/cm²)
阀型/Valve Type	带溢流型/ Wlith Overflow

*还有5、50µm可供选择。 / *5,50µm are available

型号/Model		规格/ Specifications						配件 /Accessories	
		过滤器/ Filter	减压阀/ Regulator	油雾器/ Lubricator	注2)额定流量 /Note 2)Rated Flow(L/min)	注3)接管口径 //Note 3)Port Size(G)	压力表口径 /Pressure Gauge Size	托架 /Bracket	压力表 /Pressure Gauge
AC2000-02	AC2000-02D	AF2000-03	AR2000-02	AL2000-02	500	1/4	1/8	Y20L	
AC3000-02	AC3000-02D	AF3000-02	AR3000-02	AL3000-02	2000	1/4	1/8	Y30L	G36-10-01
AC3000-03	AC3000-03D	AF3000-03	AR3000-03	AL3000-03	2000	3/8	1/8	Y30L	
AC4000-04	AC4000-04D	AF4000-04	AR4000-04	AL4000-04	4500	1/2	1/4	Y40L	
AC4000-06	AC4000-06D	AF4000-06	AR4000-06	AL4000-06	4500	3/4	1/4	Y50L	G46-10-02
AC5000-06	AC5000-06D	AF5000-06	AR5000-06	AL5000-06	5000	3/4	1/4	Y60L	
AC5000-10	AC5000-10D	AF5000-10	AR5000-10	AL5000-10	5000	1	1/4	Y60L	

外形尺寸图/Overall Dimension Drawing(mm)

AC2000~5000

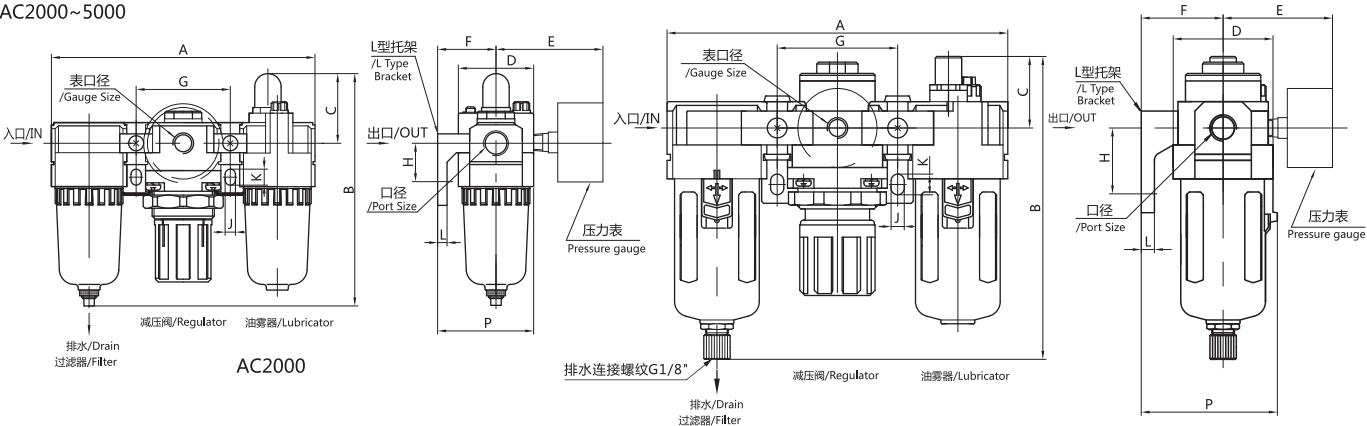


尺寸表/ Dimension Sheet (mm)

型号/Model	接管口径 Port Size(G)	压力表口径 /Pressure Gauge Size	A	B	C	D	E	F	G	H	J	K	L	P
AC2000-02	1/4	1/8	140	122	38	40	57	30	50	24	5.5	8.5	5	50
AC3000-02	1/4	1/8	181	158	38	53	61	41	64	35	7	11	7	70.5
AC3000-03	3/8	1/8	181	158	38	53	61	41	64	35	7	11	7	70.5
AC4000-04	1/2	1/4	238	191	41	70	66	50	84	40	9	13	7	88
AC4000-06	3/4	1/4	253	191	40.5	70	70	50	89	40	9	13	7	88
AC5000-06	3/4	1/4	300	268	48	90	76	70	105	50	12	16	10.5	115
AC5000-10	1	1/4	300	268	48	90	76	70	105	50	12	16	10.5	115

*标注尺寸为杠杆式自动放水器高度尺寸。*This size is for lever type auto drain.

流量特性曲线/ Characteristic Curve of Flow Rate

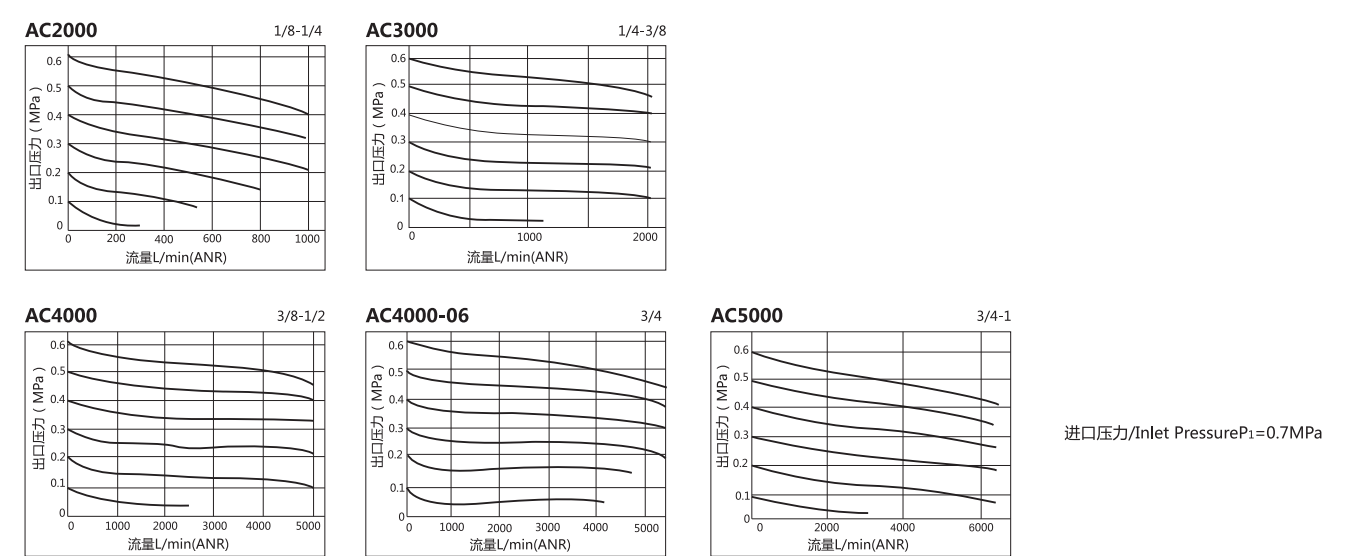

压力特性曲线/Characteristiic Curve of Pressure

